



UTHERM

PIR INSULATION BOARDS





CONTENT


The insulation boards of Unilin Insulation	4
Unilin Insulation, your insulation partner	6
Premium quality guaranteed	8
One Home - 100% ambition for 0% CO₂ emissions	11
Utherm Premium	16
An insulation solution for any need	21
Technical sheets	22
 Floor	22
 Roof	26
 Sarking	40
 Wall	46
 Attic	56
Accessories	62
Service & Logistics	68

THE INSULATION BOARDS OF UNILIN INSULATION

Unilin Insulation has the most extensive range of insulation solutions for the optimal insulation of pitched and flat roofs, walls and floors. Unilin believes in smart insulation. Because smart insulation also means using space sparingly by applying a thin insulation layer, or by using the available space as efficiently as possible. That is why we opt for PIR, the most efficient insulation product.

WHAT IS PIR?

Both PIR and PUR fall under the general heading of PU (polyurethane). It is a plastic that comes in many forms. Depending on the application, it can be made to be very flexible or, conversely, very rigid. Both PIR and PUR are manufactured using the same raw materials. The **difference is in the ratio of raw materials** and the manufacturing process, making the physicochemical bond of PIR slightly stronger. Because of their superior fire behaviour and insulation values, PIR insulation boards are regarded as an improved version of PUR. That is why our insulation boards are made of PIR.

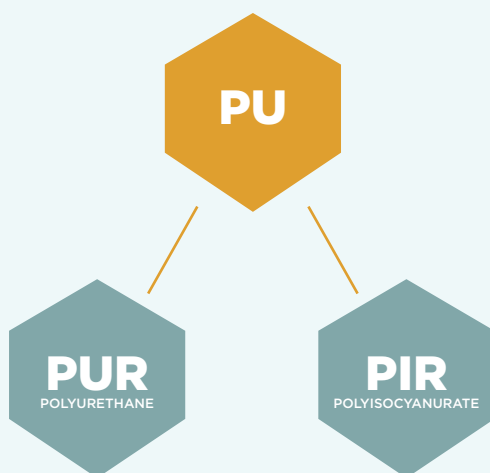

WHY IT'S SMART TO INSULATE WITH PIR



PIR is one of the **best-performing** insulating materials on the market



Simple and **optimal connection** to avoid air circulation



Excellent dimensional **stability** and **high compressive strength**



Insulate **thinner** to gain space



Perfectly **windproof** insulation shell



Lightweight and **easy** to install

PIR is present in a large number of applications. Both flexible and hard. Just think of comfortable filling for cushions, sofas, armrests and mattresses.

THREE REASONS WHY PIR IS SUSTAINABLE

1. PIR LASTS A LIFETIME

PIR maintains its shape and its insulating properties so with PIR you're set for life. Moreover, we aim to make PU recyclable by 2030, making it possible to manufacture new equivalent insulation boards from recycled raw materials.

2. PIR IS THIN INSULATION

PIR insulates very effectively with just a thin insulation layer, saving space and resources. It is also a light insulation material, making it easy to process, and with low transport costs. Moreover, supporting the building doesn't require a weighty construction. In other words, less material means more sustainable construction!

3. PIR IS ROBUST

PIR is very hard-wearing. It is robust thanks to the closed, high-density cell structure. This makes it impervious to moisture, walkable and always pressure-resistant. In other words, suitable for roofs, floors and walls.

UNILIN INSULATION, YOUR INSULATION PARTNER

- ✓ The second largest player on the European PIR market
- ✓ The largest range of insulation solutions
- ✓ 8 production sites and 5 sales and support departments in Europe, headquartered in Belgium

CUSTOM-TAILORED SOLUTIONS FOR ALL INSULATION APPLICATIONS

Unilin Insulation is part of the Unilin Group. The group consists of 3 divisions: Flooring (laminates, parquet and vinyl), Panels (MDF & chipboards, decorative panels) and Insulation (various insulation solutions). Unilin is part of the American listed company Mohawk Industries Inc., the global market leader in floor covering. Unilin Insulation has been a household name in the construction business for many years as the second largest European manufacturer of PIR insulation boards

and the undisputed market leader in Europe in terms of self-supporting roofing elements. Unilin Insulation offers custom-tailored solutions for all insulation applications, both for newbuild and renovation projects. In June 2021, Unilin Insulation took over Ballytherm: The takeover fits in with the company's strategic growth ambition, boosting its production capacity and bringing the UK's most recent PIR production facility into the fold.

- 
- Ballyconnell, Ireland
 - Navan, Ireland
 - Chesterfield, United Kingdom
 - Ross-on-Wye, United Kingdom
 - Oisterwijk, The Netherlands
 - **Desselgem, Belgium (HQ)**
 - Feluy, Belgium
 - Rosny-sous-Bois, France
 - Sury-le-Comtal, France

PREMIUM QUALITY GUARANTEED



CE MARKING

In the European Union CE marking for PIR insulation boards is mandatory. The standard Utherm PIR insulation boards with a gastight facer achieve a declared lambda value (λ_D) of 0.022 W/m.K. This declared value is used to calculate energy performance and premiums. Utherm Premium and Usafe even boast 0.020 W/m.K.



INDOOR EMISSIONS

This certificate proves that the insulation products marketed by Unilin Insulation meet the strictest quality standards applicable regarding the potential release of volatile substances into indoor environments.



EPD

The independently verified environmental product declaration (EPD) contains full details on the impact of Utherm and Usafe products on the environment that third parties need in order to carry out a life cycle analysis (LCA) of the building.



FM APPROVED

FM Approved is a quality label for risk management and damage prevention. This certificate proves that certain flat roof systems, including Utherm insulation, roof covering and substrate, meet the stringent quality demands of insurer FM Global. These quality requirements include fire safety, wind resistance, hail resistance and walkability of the roof system. The approved systems can be viewed on www.roofnav.com.



ISO 14001

According to independent certification company SGS the production facilities of Unilin Insulation meet the requirements of ISO 14001 on environmental management systems.

**With Unilin Insulation
premium results are
guaranteed.**

**The insulation boards
of Unilin Insulation
meet the most stringent
requirements and
technical conditions for a
wide variety of projects.**







100% AMBITION FOR 0% CO₂ EMISSIONS

Unilin Insulation manufactures first-rate products that allow everyone to live and work comfortably and in an energy-efficient manner. But we aim higher. How much higher is described in our sustainability programme, One Home. With this programme we resolutely opt for a climate-neutral approach, from raw materials selection to product recycling. In addition, we keep innovating so that our customers can make even more energy and comfort gains. We also create a sustainable workplace for our employees so they can work in a safe, stimulating and positive environment. This contributes to the well-being of our planet, our customers and our employees. And last but not least, it makes us future-proof.

Our One Home programme results in:

- **Climate-neutral products**
- **Energy and comfort gains for our customers**
- **Happy and healthy employees**



ACTIONS SPEAK LOUDER THAN WORDS

Despite our best efforts, we are currently still partially dependent on fossil fuels for the production of our insulation boards and roofing elements. We want to change this. That's why we will be making the energy transition from fossil (gas, grey power) to renewables (wind and green power). More than 14,500 solar panels and several wind turbines help us generate our own renewable energy. Moreover, we have plans to significantly boost this capacity in the coming years. What we still lack in

capacity afterwards will be supplemented with certified green energy. This approach is designed to make all our production facilities CO₂ neutral by 2030.

Renewable energy will replace fossil fuels to make our production activities CO₂ neutral by 2030.

1,000 TONS LESS CO2 PER YEAR THANKS TO RECYCLED PACKAGING FILM

In order to become climate-neutral it is necessary to tackle the entire production chain. And we do this. The shrink-wrap we use to package our Utherm insulation boards consists of at least 50% recycled material.

And by making this packaging film transparent it can be recycled with great efficiency, guaranteeing permanent recycling without compromising on quality. This way we reduce our CO₂ emissions by more than 1,000 tons per year.




Recycling insulation boards prevents dumping or incineration and saves on new raw materials.



**CIRCULAR
FOAM**

THE NEXT STEP: RECYCLING PU

Nothing goes to waste in a circular economy. Therefore, making PU recyclable is one of our biggest challenges. From a technical point of view, however, it's also one of the toughest. Our participation in the ambitious European CIRCULAR FOAM project will change all that. The goal is to convert PU back into the original raw materials through chemical upcycling. Through this and other techniques we aim to recycle up to 70% of our insulation boards by 2030, enabling us to manufacture new, high-performance insulation boards using 'old, recycled' raw materials. Circularity at its finest!

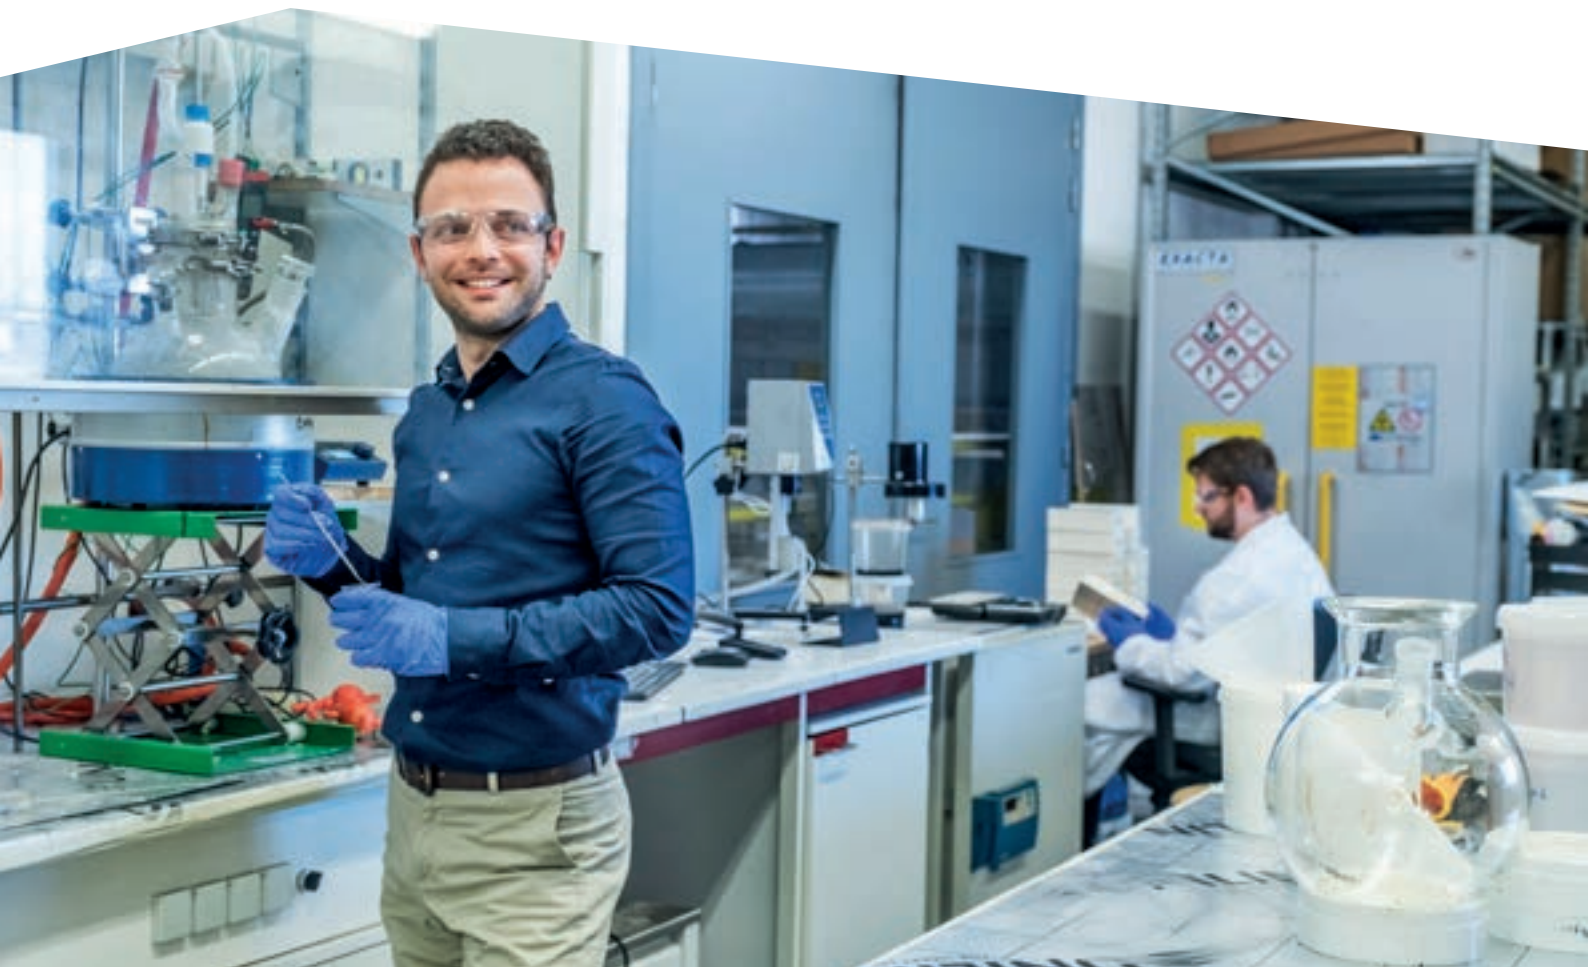



SAFETY COMES FIRST

More than 1,000 employees put their best foot forward every single day. For them we want to act as a second home. Together we form a team of entrepreneurs with a focus on lifelong learning, good health and, of course, safe working methods. That is why we strive for zero harm (= zero industrial accidents). Making this a reality

requires a permanent change in culture and a continuous effort. In all our activities, on every level, from the work floor to management... That is how we create an environment where everyone feels safe and comfortable.



The safety and health of our employees is our number one priority in everything we do.





UTHERM
Premium




SLIMMER INSULATION AND OPTIMUM ENERGY PERFORMANCE WITH UTHERM PREMIUM

REDUCED THICKNESS


Alternative
insulation material



UTHERM




UTHERM
PREMIUM



Utherm Premium is available for multiple solutions

- ✓ Slim insulation = more room for your project
- ✓ Excellent energy performance with a low lambda value of 0,020 W/m.K
- ✓ Using less insulation = respecting the environment
- ✓ Reaction to fire class E

For the technical data sheet go to page 18.

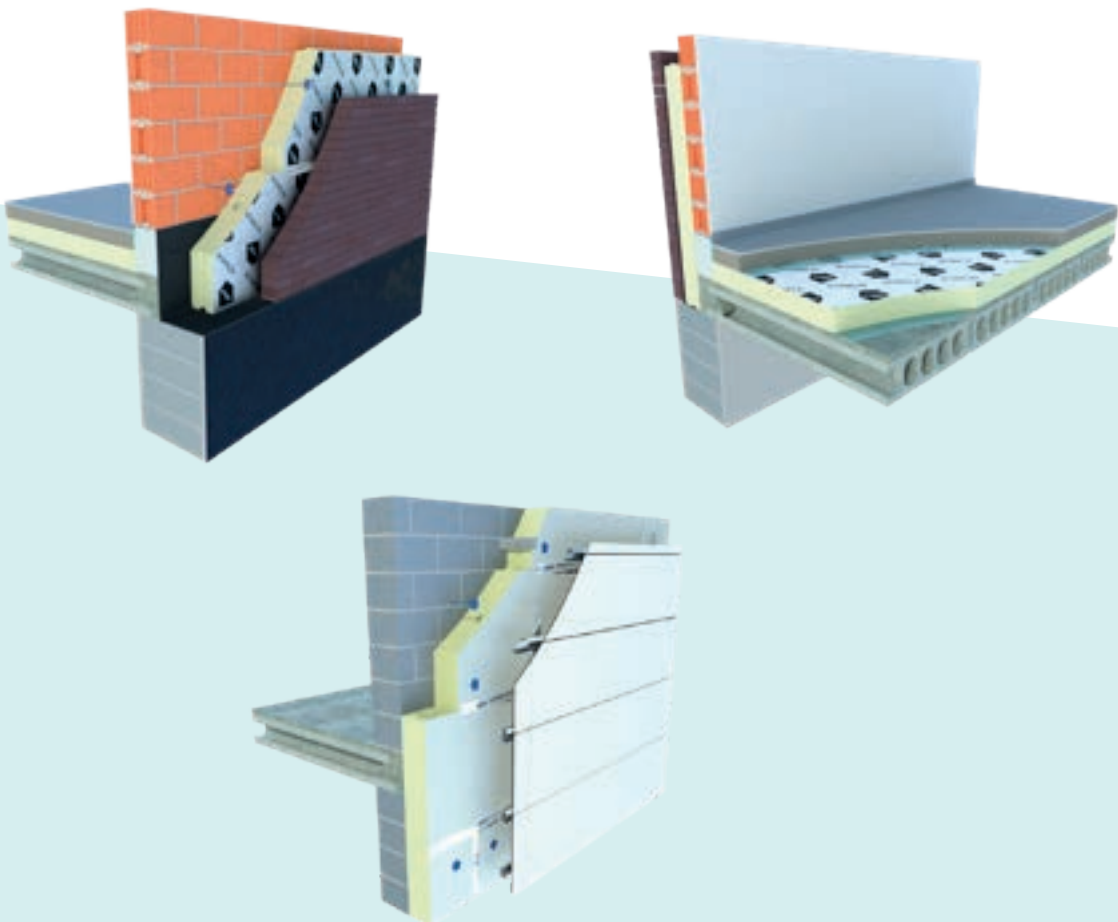

UTHERM Premium LE

**Insulation board
for floor, roof,
concrete and wall
applications**

Premium LE is a Premium PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer, finished with a preprinted grid.

Application	Insulation board for floors, roofs, cavity walls/ventilated facades and prefabricated concrete wall panels
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_D): 0,020 W/m.K
Facing	LE: multilayer gastight laminate with preprinted grid
Dimensions	Standard: 1200 x 600 mm
Edge finish	Straight on the 4 sides 




Insulation-thickness [mm]	R _{D INSUL} value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 22 pal.]	In stock	On demand*
Premium LE: 1200 x 600 mm								
20	1,00	24	17,28	240	172,80	3.801,60	✓	
30	1,50	16	11,52	160	115,20	2.534,40	✓	
40	2,00	12	8,64	120	86,40	1.900,80	✓	
50	2,50	10	7,20	100	72,00	1.584,00	✓	
60	3,00	8	5,76	80	57,60	1.267,20	✓	
70	3,50	7	5,04	70	50,40	1.108,80	✓	
80	4,00	6	4,32	60	43,20	950,40	✓	
90	4,50	5	3,60	50	36,00	792,00		✓
100	5,00	5	3,60	50	36,00	792,00	✓	
120	6,00	4	2,88	40	28,80	633,60	✓	
140	7,00	3	2,16	36	25,92	570,00		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,020 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	E according to EN 13501-1 B-s1, d0 (End-Use Eternit cladding, contact Unilin for the conditions of application)
Long term water absorption	WL(T)2 according to EN 13165 $< 2\%$

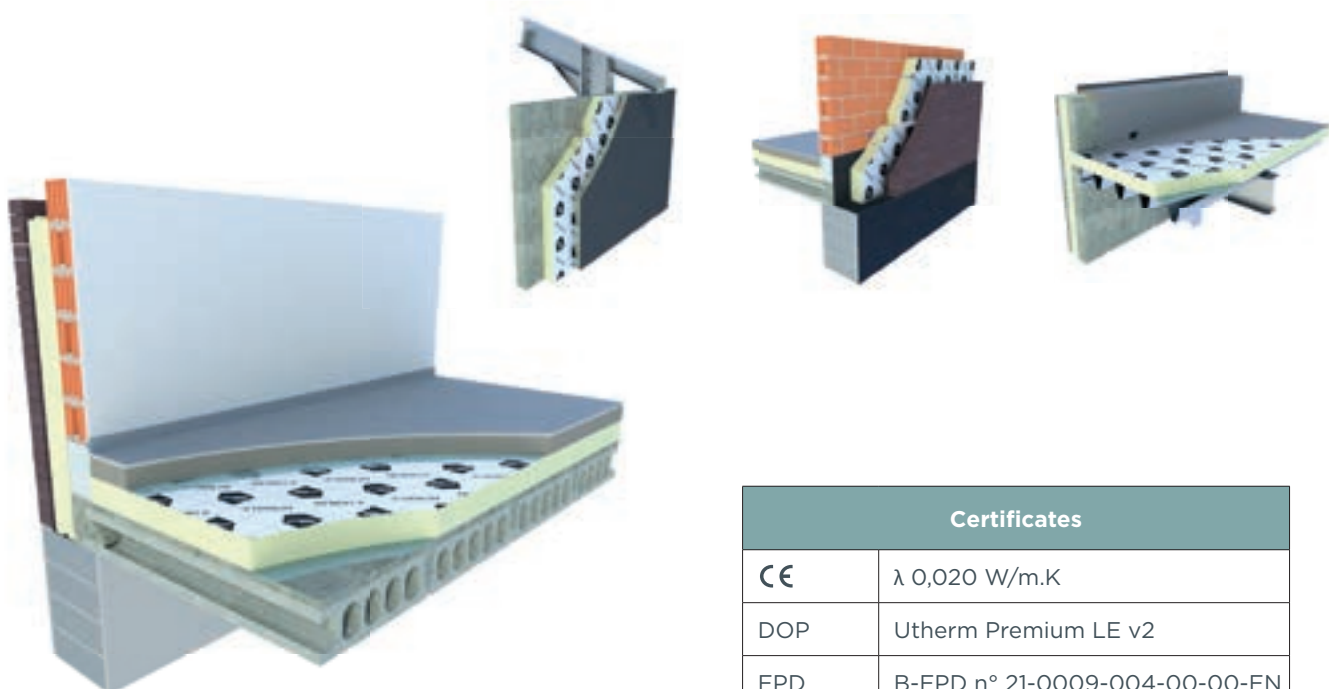

Certificates	
CE	λ 0,020 W/m.K
DOP	Utherm Premium LE v2
EPD	B-EPD n° 21-0009-004-00-00-EN



Offering insulation solutions that make a genuine difference, that is what we strive for.

AN INSULATION SOLUTION FOR ANY NEED

- ✓ The **largest range** of insulation solutions for roofs, walls, floors and industrial applications
- ✓ PIR is not just more **energy-efficient** but also a **slimmer** insulation method (space gains)
- ✓ Perfectly windproof with a tongue and groove system for optimal connection or **straight edges**, preventing air circulation (especially with a Unitape finish)
- ✓ Excellent **dimensional stability**, high compressive strength and **good fire resistance**
- ✓ Lightweight so **less labour intensive** and less stress on the structure
- ✓ **Easy to process** (from sawing to assembly)



FLOOR



ROOF



SARKING



WALL



ATTIC



Floor

Thanks to their high compressive strength, our PIR insulation boards are the most suitable solution to insulate your floors.

INSULATION FOR YOUR FLOOR



**Floor
insulation**

→ **Utherm Floor LE**

24

**Attic
insulation**

→ **Utherm Attic L OSB**

60

UTHERM Floor LE

Insulation board
for floors

Floor LE is a PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer, finished with a preprinted grid.

Application	Insulation boards for floors
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_D): 0,022 W/m.K
Facing	LE : multilayer gastight laminate with preprinted grid
Dimensions	Standard : 1200 x 600 mm or 2400 x 1200 mm
Edge finish	Straight on the 4 sides 

lambda-value:
0,022
W/m.K




Insulation-thickness [mm]	R _{D,INSUL} value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 22 pal.]	In stock	On demand*
Floor LE: 1200 x 600 mm								
20	0,90	24	17,28	240	172,80	3.801,60	✓	
30	1,35	16	11,52	160	115,20	2.534,40	✓	
40	1,80	12	8,64	120	86,40	1.900,80	✓	
50	2,25	10	7,20	100	72,00	1.584,00	✓	
60	2,70	8	5,76	80	57,60	1.267,20	✓	
70	3,15	7	5,04	70	50,40	1.108,80	✓	
80	3,60	6	4,32	60	43,20	950,40	✓	
90	4,05	5	3,60	50	36,00	792,00		✓
100	4,50	5	3,60	50	36,00	792,00	✓	
120	5,45	4	2,88	40	28,80	633,60	✓	
140	6,35	3	2,16	36	25,92	570,24		✓
160	7,25	3	2,16	30	21,60	475,20		✓
180	8,15	2	1,44	24	17,28	380,16		✓
200	9,05	2	1,44	24	17,28	380,16		✓

Insulation-thickness [mm]	R _{D,INSUL} value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 11 pal.]	In stock	On demand*
Floor LE: 2400 x 1200 mm								
30	1,35	16	46,08	80	230,40	2.534,40		✓
40	1,80	12	34,56	60	172,80	1.900,80		✓
50	2,25	10	28,80	50	144,00	1.584,00		✓
60	2,70	8	23,04	40	115,20	1.267,20		✓
70	3,15	7	20,16	35	100,80	1.108,80		✓
80	3,60	6	17,28	30	86,40	950,40		✓
90	4,05	5	14,40	25	72,00	792,00		✓
100	4,50	5	14,40	25	72,00	792,00		✓
120	5,45	4	11,52	20	57,60	633,60		✓
140	6,35	3	8,64	18	51,84	570,24		✓
160	7,25	3	8,64	15	43,20	475,20		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta e_{l,b} \leq 2$ / $\Delta e_d \leq 6$ DS(-20,-)1: $\Delta e_{l,b} \leq 1$ / $\Delta e_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	E according to EN 13501-1
Long term water absorption	WL(T)2 according to EN 13165 < 2%

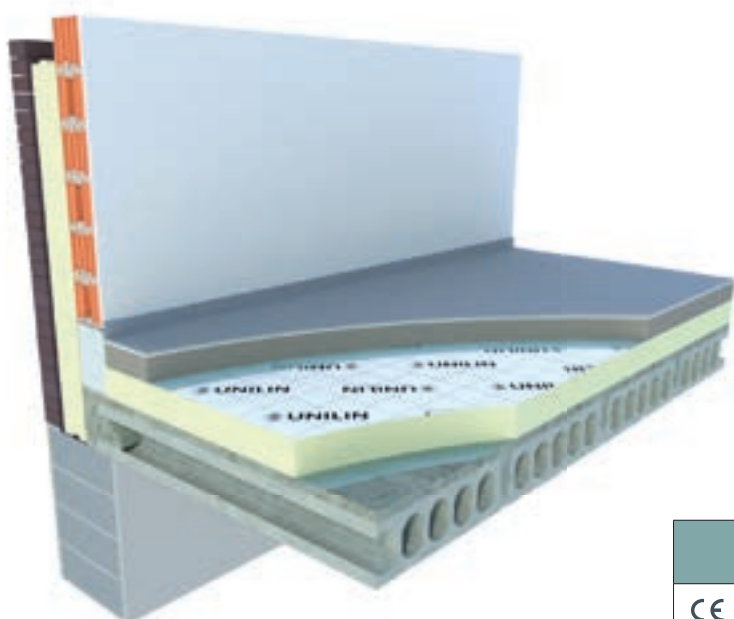

Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Floor LE v3
EPD	B-EPD n° 21-0009-004-00-00-EN




Roof

Our range offers a solution with a suitable protective coating for every flat roof and every roof covering.



INSULATION FOR YOUR FLAT ROOF

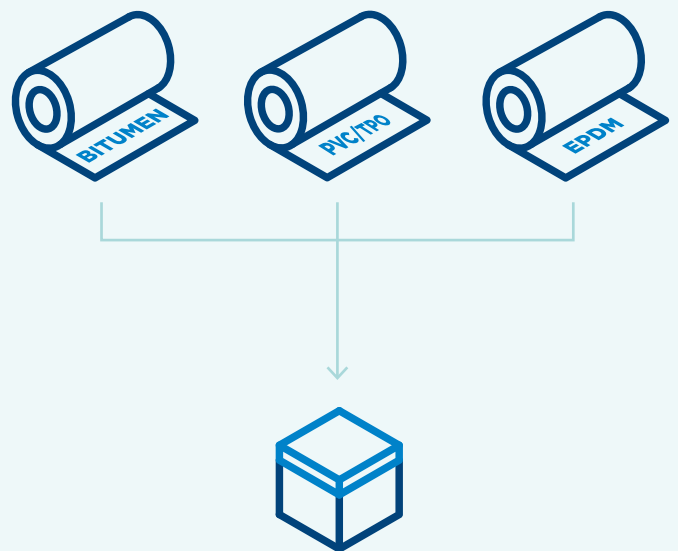

Utherm Roof LE	28
Utherm Roof LE LS	30
Utherm Roof LE Pro	32
Utherm Roof LE Tapered	34
Utherm Roof K	36
Utherm Roof BM	38

UTHERM Roof LE

Insulation board
for roofs

Roof LE is a PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer.

Application	Insulation boards for flat and low sloped roofs
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_D): 0,022 W/m.K
Facing	LE: multilayer gastight laminate
Dimensions	Standard: 1200 x 600 mm or 2400 x 1200 mm
Edge finish	Straight on the 4 sides



lambda-value:
0,022
W/m.K




Insulation-thickness [mm]	R _D INSUL value [m ² K/W] CE	Boards per pack	m ² per pack	Boards per pallet	m ² per pallet	m ² full load [= 22 pal.]	In stock	On demand*
Roof LE: 1200 x 600 mm								
20	0,90	24	17,28	240	172,80	3.801,60	✓	
30	1,35	16	11,52	160	115,20	2.534,40	✓	
40	1,80	12	8,64	120	86,40	1.900,80	✓	
50	2,25	10	7,20	100	72,00	1.584,00	✓	
60	2,70	8	5,76	80	57,60	1.267,20	✓	
70	3,15	7	5,04	70	50,40	1.108,80	✓	
80	3,60	6	4,32	60	43,20	950,40	✓	
90	4,05	5	3,60	50	36,00	792,00	✓	
100	4,50	5	3,60	50	36,00	792,00	✓	
110	5,00	4	2,88	40	28,80	633,60	✓	
120	5,45	4	2,88	40	28,80	633,60	✓	
140	6,35	3	2,16	36	25,92	570,24	✓	
142	6,45	3	2,16	30	21,60	475,20	✓	
160	7,25	3	2,16	30	21,60	475,20	✓	
180	8,15	2	1,44	24	17,28	380,16	✓	
200	9,05	2	1,44	24	17,28	380,16	✓	

Insulation-thickness [mm]	R _D INSUL value [m ² K/W] CE	Boards per pack	m ² per pack	Boards per pallet	m ² per pallet	m ² full load [= 11 pal.]	In stock	On demand*
Roof LE: 2400 x 1200 mm								
20	0,90	24	69,12	120	345,60	3.801,60	✓	
30	1,35	16	46,08	80	230,40	2.534,40	✓	
40	1,80	12	34,56	60	172,80	1.900,80	✓	
50	2,25	10	28,80	50	144,00	1.584,00	✓	
60	2,70	8	23,04	40	115,20	1.267,20	✓	
70	3,15	7	20,16	35	100,80	1.108,80	✓	
80	3,60	6	17,28	30	86,40	950,40	✓	
90	4,05	5	14,40	25	72,00	792,00	✓	
100	4,50	5	14,40	25	72,00	792,00	✓	
110	5,00	4	11,52	20	57,60	633,60	✓	
120	5,45	4	11,52	20	57,60	633,60	✓	
140	6,35	3	8,64	18	51,84	570,24	✓	
142	6,45	3	8,64	15	43,20	475,20	✓	
160	7,25	3	8,64	15	43,20	475,20	✓	

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	E according to EN 13501-1 B-s1, d0 (End-use steel deck)
Long term water absorption	WL(T)2 according to EN 13165 < 2%

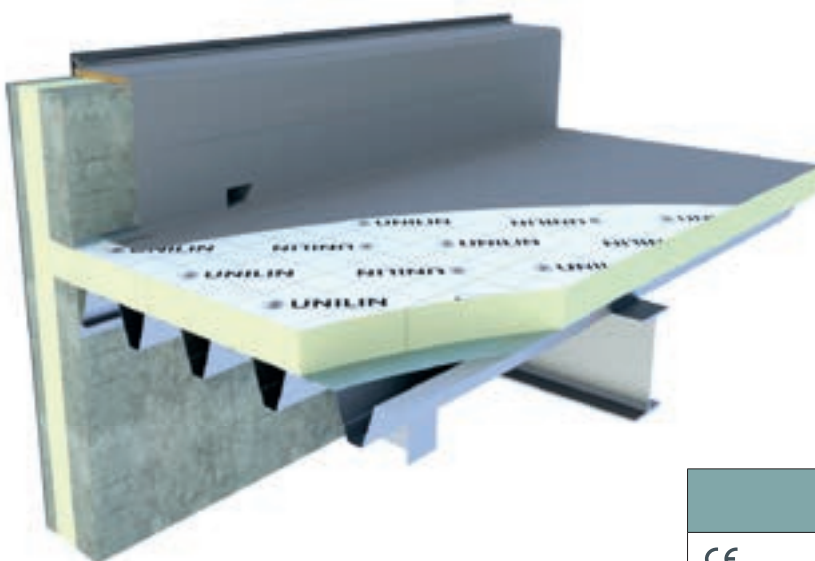

Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Roof LE v3
EPD	B-EPD n° 21-0009-004-00-00-EN

UTHERM Roof LE LS

Insulation board
for roofs

Utherm Roof LE LS is a PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer, with rebated (shiplap) edge finish on the 4 sides.

Application	Insulation boards for flat and low sloped roofs
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_D): 0,022 W/m.K
Facing	LE : multilayer gastight laminate
Dimensions	Standard : 1.200 x 600 mm or 2.400 x 1.200 mm
Edge finish	Shiplap (rebated) on the 4 sides 

lambda-value:
0,022
W/m.K




Insulation-thickness [mm]	R _{D INSUL} value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 22 pal.]	In stock	On demand*
Roof LE LS: 1.200 x 600 mm								
60	2,70	8	5,76	80	57,60	1.267,20	✓	
80	3,60	6	4,32	60	43,20	950,40	✓	
100	4,50	5	3,60	50	36,00	792,00	✓	
120	5,45	4	2,88	40	28,80	633,60	✓	
140	6,35	3	2,16	36	25,92	570,24	✓	
160	7,25	3	2,16	30	21,60	475,20	✓	
180	8,15	2	1,44	24	17,28	380,16		✓
200	9,05	2	1,44	24	17,28	380,16		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR100 ≥ 100 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	E according to EN 13501-1 B-s1, d0 (End-use steel deck)
Long term water absorption	WL(T)2 according to EN 13165 < 2%

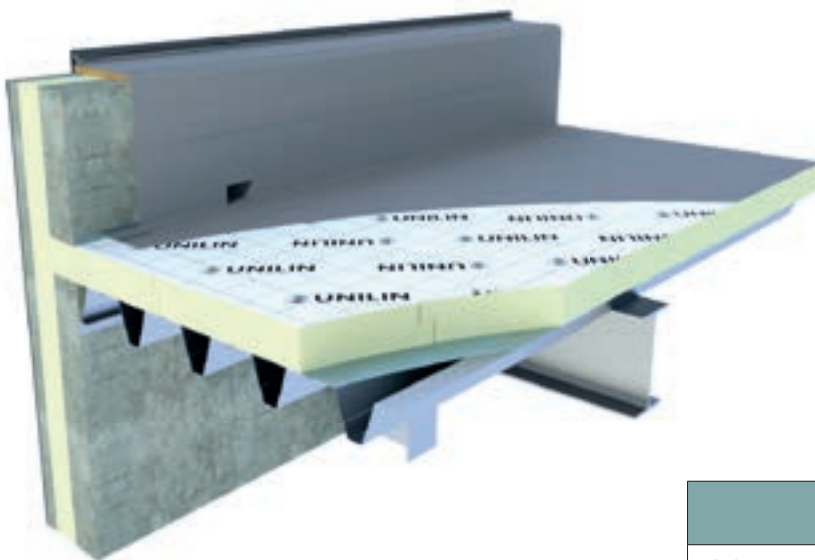

Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Roof LE v3
EPD	B-EPD n° 21-0009-004-00-00-EN

UTHERM Roof LE Pro

Insulation board
for roofs

Roof LE Pro is a PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer and FM Approved.

Application Insulation boards for flat and low sloped roofs

Insulation Polyisocyanurate (PIR)
Declared lambda-value (λ_D):
0,022 W/m.K

Facing LE Pro: multilayer gastight laminate

Dimensions Standard: 1200 x 600 mm
or 2400 x 1200 mm

Edge finish Straight on the 4 sides



lambda-value:
0,022
W/m.K




Insulation-thickness [mm]	R _{D INSUL} value [m ² K/W] CE	Boards per pack	m ² per pack	Boards per pallet	m ² per pallet	m ² full load [= 22 pal.]	In stock	On demand*
Roof LE Pro: 1200 x 600 mm								
50	2,25	10	7,20	100	72,00	1.584,00		✓
60	2,70	8	5,76	80	57,60	1.267,20		✓
70	3,15	7	5,04	70	50,40	1.108,80		✓
80	3,60	6	4,32	60	43,20	950,40		✓
90	4,05	5	3,60	50	36,00	792,00		✓
100	4,50	5	3,60	50	36,00	792,00		✓
110	5,00	4	2,88	40	28,80	633,60		✓
120	5,45	4	2,88	40	28,80	633,60		✓
140	6,35	3	2,16	36	25,92	570,24		✓
142	6,45	3	2,16	30	21,60	475,20		✓
160	7,25	3	2,16	30	21,60	475,20		✓
180	8,15	2	1,44	24	17,28	380,16		✓
200	9,05	2	1,44	24	17,28	380,16		✓

Insulation-thickness [mm]	R _{D INSUL} value [m ² K/W] CE	Boards per pack	m ² per pack	Boards per pallet	m ² per pallet	m ² full load [= 11 pal.]	In stock	On demand*
Roof LE Pro: 2400 x 1200 mm								
50	2,25	10	28,80	50	144,00	1.584,00		✓
60	2,70	8	23,04	40	115,20	1.267,20		✓
70	3,15	7	20,16	35	100,80	1.108,80		✓
80	3,60	6	17,28	30	86,40	950,40		✓
90	4,05	5	14,40	25	72,00	792,00		✓
100	4,50	5	14,40	25	72,00	792,00		✓
110	5,00	4	11,52	20	57,60	633,60		✓
120	5,45	4	11,52	20	57,60	633,60		✓
140	6,35	3	8,64	18	51,84	570,24		✓
142	6,45	3	8,64	15	43,20	475,20		✓
160	7,25	3	8,64	15	43,20	475,20		✓
180	8,15	2	5,76	12	34,56	380,16		✓
200	9,05	2	5,76	12	34,56	380,16		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	E according to EN 13501-1 B-s1, d0 (End-use steel deck)
Long term water absorption	WL(T)2 according to EN 13165 < 2%

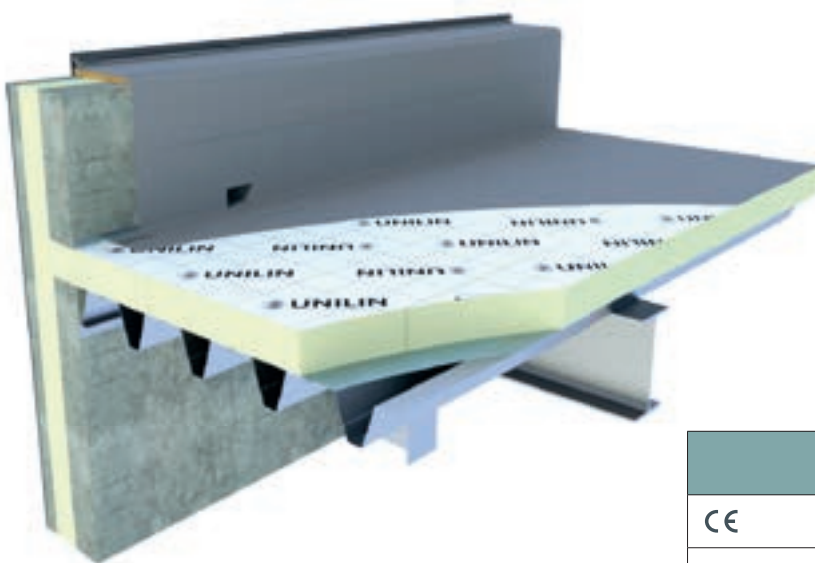

Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Roof LE Pro v1
EPD	B-EPD n° 21-0009-004-00-00-EN
FM	FM approved per Approval Standard 4470

UTHERM

Roof LE Tapered

Insulation board
for roofs

Roof LE Tapered is a tapered PIR insulation board Euroclass E finished on both sides beide sides with a multilayer gastight laminate facer.

Application Insulation boards with one-sided taper for flat roofs

Insulation Polyisocyanurate (PIR)
Declared lambda-value (λ_D): 0,022 W/m.K

Facing LE : multilayer gastight laminate

Dimensions Standard: 1200 x 1200 mm

Edge finish Straight on the 4 sides



lambda-value:
0,022
W/m.K




Insulation-thickness [mm]	R _{D INSUL} average value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 22 pal.]	In stock	On demand*
Roof LE Tapered 15 mm : 1200 x 1200 mm								
30/45	1,70	8	11,52	64	92,16	2.027,52	✓	
45/60	2,35	6	8,64	48	69,12	1.520,60	✓	
60/75	3,05	4	5,76	36	51,84	1.140,48	✓	
75/90	3,75	6	8,64	30	43,30	950,40	✓	
90/105	4,40	4	5,76	24	34,56	760,32	✓	
105/120	5,10	4	5,76	20	28,80	633,60	✓	
Roof LE Tapered 25 mm : 1200 x 1200 mm								
30/55	1,90	10	14,40	50	72,00	1.584,00	✓	
55/80	3,05	6	8,64	36	51,84	1.140,48	✓	
80/105	4,20	4	5,76	24	34,56	760,32	✓	
105/130	5,30	4	5,76	20	28,80	633,60	✓	
Roof LE Tapered 30 mm : 1200 x 1200 mm								
30/60	2,00	10	14,40	50	72,00	1.584,00	✓	
60/90	3,40	6	8,64	30	43,20	950,40	✓	
90/120	4,75	4	5,76	24	34,56	760,32	✓	

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	E according to EN 13501-1 B-s1, d0 (End-use steel deck)
Long term water absorption	WL(T)2 according to EN 13165 < 2%

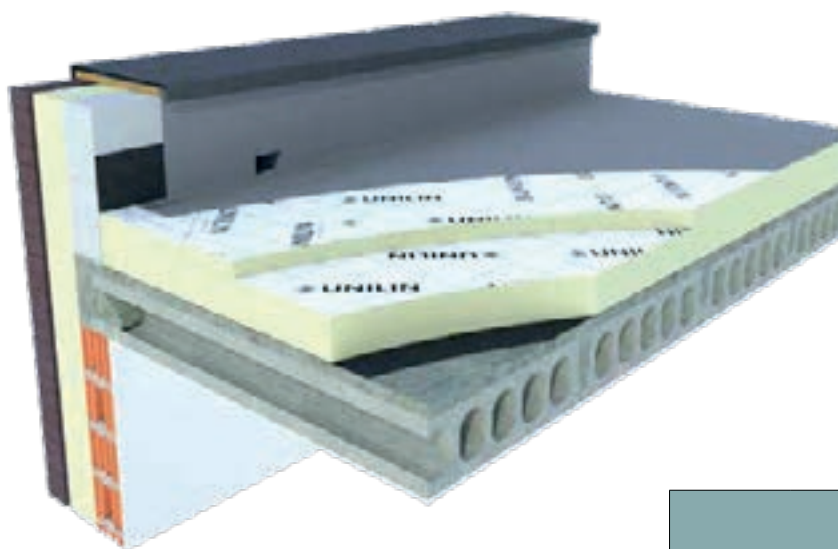

Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Roof LE Tapered v3
EPD	B-EPD n° 21-0009-004-00-00-EN

UTHERM Roof K

Insulation board
for roofs

Roof K is a PIR insulation board finished on both sides with a multilayer gastight laminate facer.


Application Insulation boards for flat roofs

Insulation Polyisocyanurate (PIR)
Declared lambda-value (λ_D):
0,022 W/m.K

Facing K : multilayer gastight laminate with brown color to prevent blinding effect during installation

Dimensions Standard : 600 x 600 mm

Edge finish Straight on the 4 sides

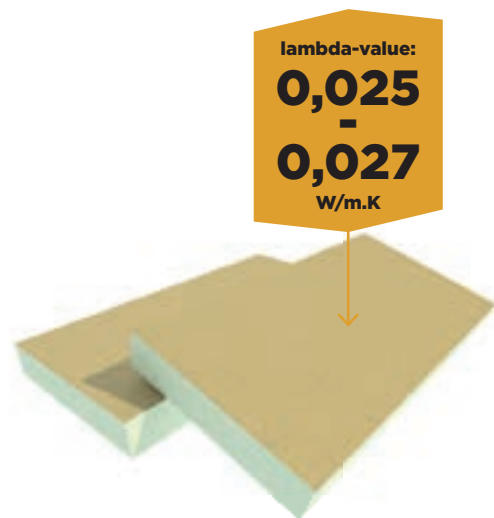


Insulation-thickness [mm]	R _{D INSUL} value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 11 pal.]	In stock	On demand*
Roof K: 600 x 600 mm								
30	1,35	32	11,52	320	115,20	2534,00		✓
40	1,85	24	8,64	240	86,40	1900,00	✓	
50	2,30	20	7,20	200	72,00	1584,00	✓	
60	2,75	16	5,76	160	57,60	1267,00	✓	
70	3,20	14	5,04	140	50,40	1108,00		✓
80	3,70	12	4,32	120	43,20	950,00	✓	
98	4,50	10	3,60	100	36,00	792,00	✓	
100	4,60	10	3,60	100	36,00	792,00	✓	
120	5,55	8	2,88	80	28,80	633,00	✓	
140	6,45	6	2,16	72	25,92	570,00	✓	
160	7,40	6	2,16	60	21,60	475,00	✓	

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	F according to EN 13501-1
Long term water absorption	WL(T)2 according to EN 13165 < 2%

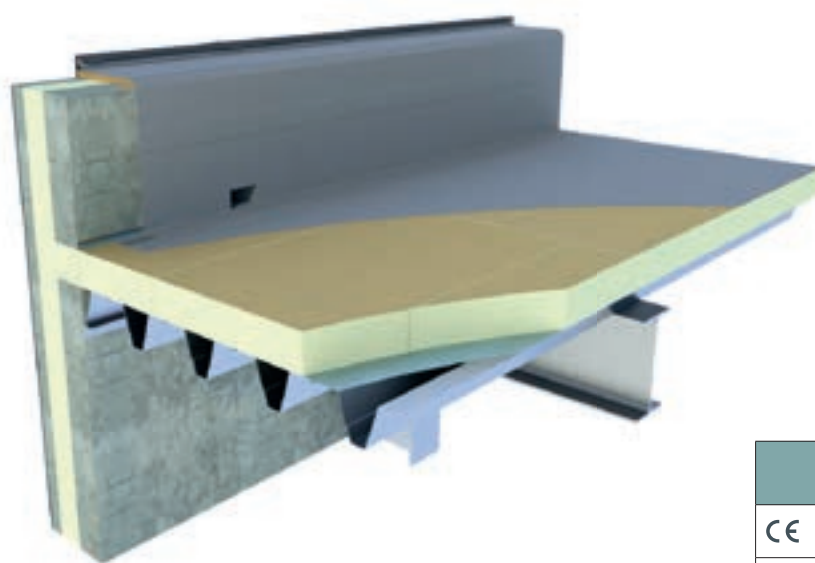


Certificates	
CE	λ 0,022 W/m.K
EPD	11-1941 : 2018
ACERMI	n° 13/121/818

UTHERM Roof BM

Insulation board
for roofs

Roof BM is a PIR insulation board finished on one side with a gas open bituminized glassfleece and on the other side with a gas open mineralized glassfleece.

Application	Insulation boards for flat roofs
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_D): 0,027 W/m.K (d < 80 mm) 0,026 W/m.K (80 mm ≤ d < 120 mm) 0,024 W/m.K (d ≥ 120 mm)
Facing	B : bituminized glassfleece M : mineralised glassfleece
Dimensions	Standard: 1200 x 600 mm
Edge finish	Straight on the 4 sides

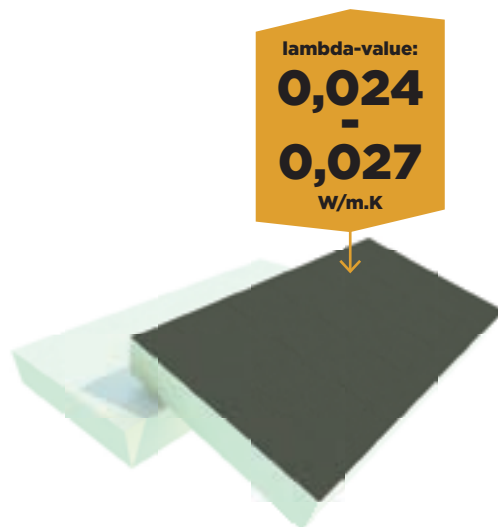


Insulation-thickness [mm]	R _{D INSUL} value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 22 pal.]	In stock	On demand*
Roof BM: 1.200 x 600 mm								
30	1,10	16	11,52	160	115,20	2.534,40		✓
40	1,45	12	8,64	120	86,40	1.900,80		✓
50	1,85	10	7,20	100	72,00	1.584,00		✓
60	2,20	8	5,76	80	57,60	1.267,20	✓	
70	2,55	7	5,04	70	50,40	1.108,80		✓
80	3,05	6	4,32	60	43,20	950,40	✓	
100	3,80	5	3,60	50	36,00	792,00	✓	
120	5,00	4	2,88	40	28,80	633,60	✓	
140	5,80	3	2,16	36	25,92	570,24		✓
160	6,65	3	2,16	30	21,60	475,20		✓
200	8,30	2	1,44	24	17,28	380,16		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,027 W/m.K (d < 80 mm) 0,026 W/m.K (80 mm ≤ d < 120 mm) 0,024 W/m.K (d ≥ 120 mm)
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) ≤ 5%
Density of the PIR foam	32 kg/m ³ ± 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	F according to EN 13501-1
Long term water absorption	WL(T)2 according to EN 13165 < 2%

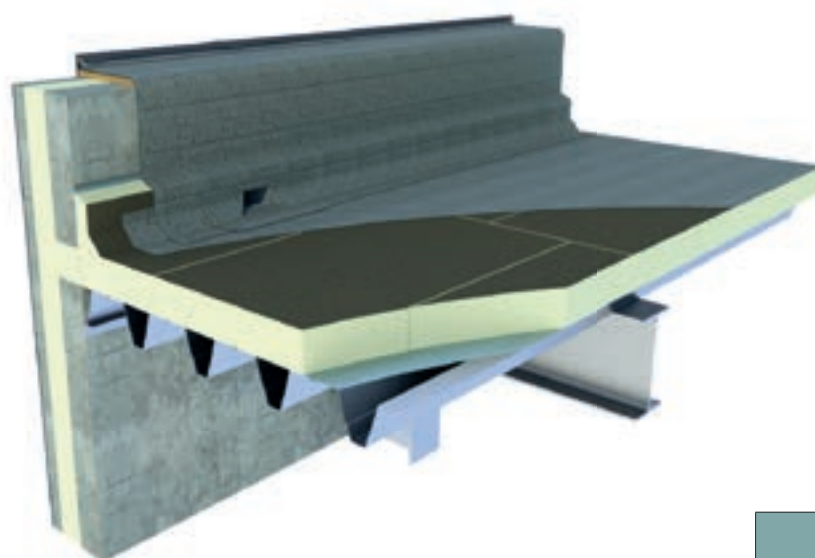

Certificates	
CE	λ 0,024 - 0,027 W/m.K
DOP	Utherm Roof BM v1



Sarking



**Insulation boards
with an integrated
underlay make any
pitched roof wind-
and waterproof in
no time.**



INSULATION FOR YOUR PITCHED ROOF



(Post-) insulation on the outside with Utherm Sarking

→ Immediately wind-
and waterproof?

→ **Utherm Sarking LE** — 42

→ Wind- and waterproof
with fire class E

→ **Utherm Sarking LE Plus** — 44

(Post-) insulation on the inside

→ **Utherm Attic L GYP** — 58

UTHERM Sarking LE

**Insulation board
for pitched roof
and sarking**

Sarking LE is a PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer.

Application Insulation boards for the outside of pitched roof and as sarking without (adhered) underslating

Insulation Polyisocyanurate (PIR)
Declared lambda-value (λ_D):
0,022 W/m.K

Facing LE : multilayer gastight laminate

Dimensions Standard: 2400 x 1200 mm

Edge finish Tongue- & groove joint along the 4 sides



lambda-value:
0,022
W/m.K



Insulation-thickness [mm]	R _{D INSUL} value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 11 pal.]	In stock	On demand*
Sarking LE: 2400 x 1200 mm								
40	1,80	12	34,56	60	172,80	1.900,80		✓
60	2,70	8	23,04	40	115,20	1.267,20		✓
80	3,60	6	17,28	30	86,40	950,40		✓
100	4,50	3	8,64	24	69,12	760,32		✓
120	5,45	4	11,52	20	57,60	633,60		✓
140	6,35	3	8,64	18	51,84	570,24		✓
160	7,25	3	8,64	15	43,20	475,20		✓
180	8,15	2	5,76	14	40,32	380,16		✓
200	9,05	2	5,76	12	34,56	380,16		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	E according to EN 13501-1
Long term water absorption	WL(T)2 according to EN 13165 < 2%



Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Sarking LE v2
EPD	B-EPD n° 21-0009-004-00-00-EN

UTHERM

Sarking LE Plus

Sarking LE Plus is a PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer, on the outer side finished with a waterproof, vapor open underlayment adhered on the board surface.

**Insulation board
for pitched roof
and sarking**

lambda-value:
0,022
W/m.K



Application Sarking LE Plus is a PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer, on the outer side finished with a waterproof, vapor open underlayment adhered on the board surface.

Insulation Polyisocyanurate (PIR)
Declared lambda-value (λ_D):
0,022 W/m.K

Facing LE : multilayer gastight laminate
Plus : waterproof, vapor open underlayment; blue color, adhered board, with overlap

Dimensions Standard: 2.400 x 1.200 mm

Edge finish Tongue- & groove joint along the 4 sides




Insulation-thickness [mm]	R _{D INSUL} value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 11 pal.]	In stock	On demand*
Sarking LE Plus: 2.400 x 1.200 mm								
60	2,70	6	17,28	42	120,96	1.330,56		✓
80	3,60	4	11,52	28	80,64	887,04	✓	
100	4,50	3	8,64	24	69,12	760,32	✓	
120	5,45	3	8,64	21	60,48	665,28	✓	
140	6,35	3	8,64	18	51,84	570,24	✓	
160	7,25	2	5,76	14	40,32	443,52	✓	
180	8,15	2	5,76	14	40,32	443,52		✓
200	9,05	2	5,76	12	34,56	380,16		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	$\leq 0,03$ m
Reaction to fire class	E according to EN 13501-1
Long term water absorption	WL(T)2 according to EN 13165 < 2%

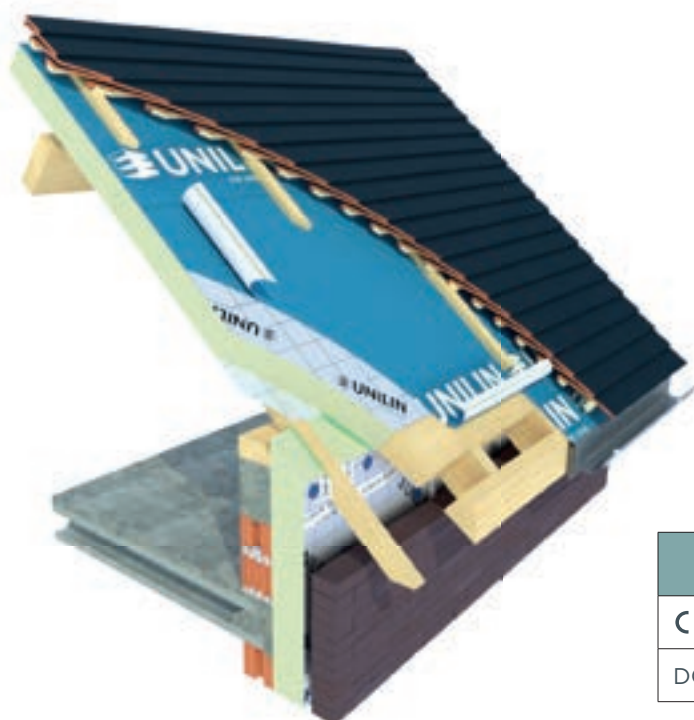

Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Sarking LE Plus v4



Wall



We keep innovating our range, for instance through a tongue and groove system that makes the installation of insulation boards even easier.



INSULATION FOR YOUR WALL

Insulation on the outside - Façade cladding systems & cavity wall

→ Standard solution



→ **Utherm Wall LE** ————— 48

→ **Utherm Wall A** ————— 50

Insulation on the inside

→ Standard solution

→ **Utherm Wall K Gyp** ————— 52

→ Damp space

→ **Utherm Wall K Gyp H** ————— 54

UTHERM Wall LE

Insulation board
for cavity wall
and ventilated
façade

Wall LE is a PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer.

Application	Insulation boards for cavity walls
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_D): 0,022 W/m.K
Facing	LE: multilayer gastight laminate
Dimensions	Standard: 1.200 x 600 mm
Edge finish	Tongue- & groove joint along the 4 sides




Insulation-thickness [mm]	R _{D INSUL} value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 22 pal.]	In stock	On demand*
Wall LE: 1.200 x 600 mm								
40	1,80	12	8,64	120	86,40	1.900,80		✓
50	2,25	10	7,20	100	72,00	1.584,00		✓
60	2,70	8	5,76	80	57,60	1.267,20		✓
70	3,15	7	5,04	70	50,40	1.108,80		✓
80	3,60	6	4,32	60	43,20	950,40		✓
90	4,05	5	3,60	50	36,00	792,00		✓
100	4,50	5	3,60	50	36,00	792,00		✓
110	5,00	4	2,88	40	28,80	633,60		✓
120	5,45	4	2,88	40	28,80	633,60		✓
140	6,35	3	2,16	36	25,92	570,24		✓
160	7,25	3	2,16	30	21,60	475,20		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	E according to EN 13501-1 B-s1, d0 (End-Use Eternit cladding, contact Unilin for the conditions of application)
Long term water absorption	WL(T)2 according to EN 13165 $< 2\%$

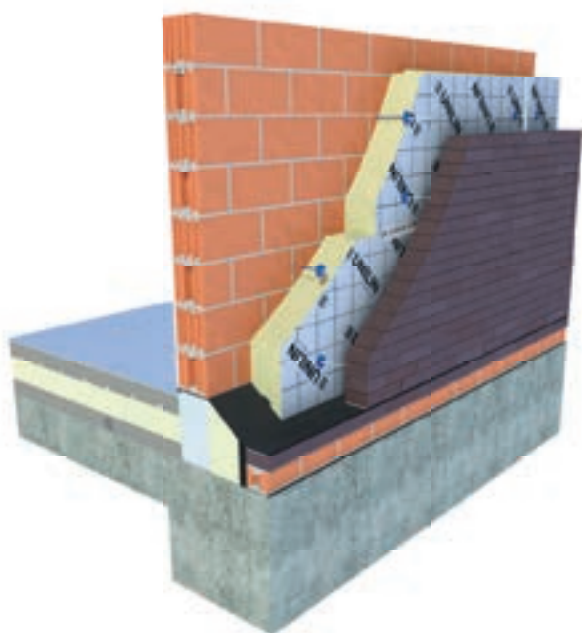


Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Wall LE v3
EPD	B-EPD n° 21-0009-004-00-00-EN

UTHERM Wall A

**Insulation board
for ventilated
façade and fire
reaction class D**

**Wall A is a PIR insulation board Euroclass D
finished on both sides with a gastight pure
aluminium facing of approx. 50 µm.**

Application	Insulation boards for cavity walls and for ventilated façades
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_D): 0,022 W/m.K
Facing	A : light-wiped, gastight pure aluminum of approx. 50 µm
Dimensions	Standard: 1200 x 600 mm
Edge finish	Tongue- & groove joint along the 4 sides 

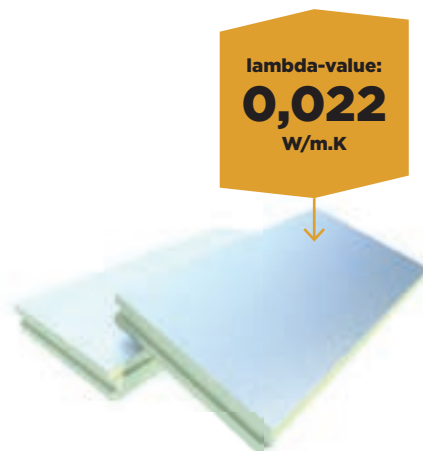


Insulation-thickness [mm]	R _{D INSUL} value [m²K/W] CE	Boards per pack	m² per pack	Boards per pallet	m² per pallet	m² full load [= 22 pal.]	In stock	On demand*
Wall A: 1200 x 600 mm								
40	1,80	12	8,64	120	86,40	1.900,80		✓
50	2,25	10	7,20	100	72,00	1.584,00		✓
60	2,70	8	5,76	80	57,60	1.267,20		✓
70	3,15	7	5,04	70	50,40	1.108,80		✓
80	3,60	6	4,32	60	43,20	950,40	✓	
90	4,05	5	3,60	50	36,00	792,00		✓
100	4,50	5	3,60	50	36,00	792,00	✓	
110	5,00	4	2,88	40	28,80	633,60		✓
120	5,45	4	2,88	40	28,80	633,60	✓	
140	6,35	3	2,16	36	25,92	570,24	✓	
160	7,25	3	2,16	30	21,60	475,20		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	0,022 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	D-s2, d0 according to EN 13501-1 B-s1, d0 (End-Use Eternit cladding, contact Unilin for the conditions of application)
Long term water absorption	WL(T)2 according to EN 13165 $< 2\%$

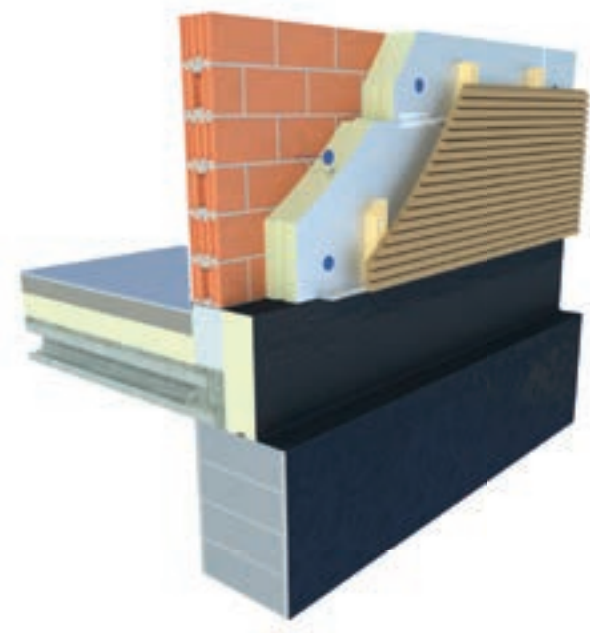

Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Wall A v3
EPD	B-EPD n° 21-0009-003-00-00-EN

UTHERM Wall K Gyp

**Insulation board
for post-insulation
of walls
and façades**

Wall K Gyp is a PIR insulation board finished on both sides with a multilayer gastight laminate facer. Wall K Gyp is at one side finished with a layer of 12,5 mm thick plasterboard.

Application	Insulation and finishing combined in one board for post-insulation of walls and façades from the inside out
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_p): 0,022 W/m.K
Facing	K : multilayer gastight laminate Gyp : 12,5 mm plasterboard at one side
Dimensions	Standard: 2.600 x 600 mm eller 2.600 x 1.200 mm
Edge finish	Combination with straight edges on the 4 sides and chamfered plasterboard




Total thickness [mm]	$R_{D,ISOL+GYP}$ value [m ² K/W] CE	Thickness insulation [mm]	Thickness Gyp [mm]	Boards per pallet	m ² per pallet	Weight [kg/pcs]	In stock	On demand*
Wall K Gyp: 2.600 x 600 mm								
30 + 12,5	1,40	30	12,5	56	87,36	15,90		✓
40 + 12,5	1,85	40	12,5	46	71,76	16,40		✓
50 + 12,5	2,30	50	12,5	38	59,28	16,90		✓
60 + 12,5	2,75	60	12,5	32	49,92	17,40		✓
80 + 12,5	3,65	80	12,5	26	40,56	18,40		✓
100 + 12,5	4,55	100	12,5	18	28,08	19,40		✓
120 + 12,5	5,50	120	12,5	16	24,96	20,40		✓

Total thickness [mm]	$R_{D,ISOL+GYP}$ value [m ² K/W] CE	Thickness insulation [mm]	Thickness Gyp [mm]	Boards per pallet	m ² per pallet	Weight [kg/pcs]	In stock	On demand*
Wall K Gyp: 2.600 x 1.200 mm								
30 + 12,5	1,40	30	12,5	28	87,36	31,85	✓	
40 + 12,5	1,85	40	12,5	23	71,76	32,85	✓	
50 + 12,5	2,30	50	12,5	19	59,28	33,85	✓	
60 + 12,5	2,75	60	12,5	16	49,92	34,85		✓
80 + 12,5	3,65	80	12,5	13	40,56	36,85		✓
100 + 12,5	4,55	100	12,5	9	28,08	38,85	✓	
120 + 12,5	5,50	120	12,5	8	24,96	40,85		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	PIR: 0,022 W/m.K Gyp: 0,25 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	B-s1, d0 according to EN 13501-1
Long term water absorption	WL(T)2 according to EN 13165 < 2%

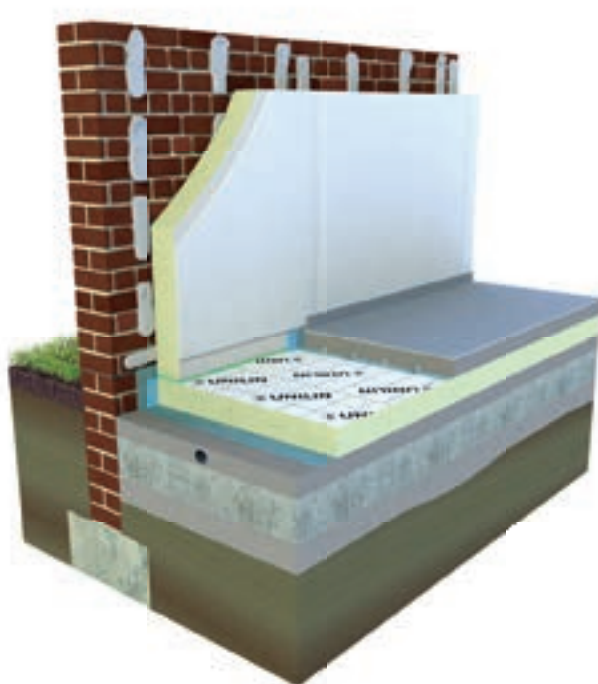


Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Wall K Gyp v4

UTHERM Wall K Gyp H

**Insulation board
for post-insulation
of walls and
façades**

Wall K Gyp H is a PIR insulation board finished on both sides with a multilayer gastight laminate facer. Wall K Gyp H is at one side finished with a layer of 12,5 mm thick water and moisture resistant plasterboard.

Application	Insulation and finishing in one board for post-insulation of walls and façades from the inside out
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_p): 0,022 W/m.K
Facing	K : multilayer gastight laminate Gyp H : 12,5 mm plasterboard at one side, grade WPR
Dimensions	Standard: 2.600 x 1.200 mm
Edge finish	Combination with straight edges on the 4 sides and chamfered plasterboard

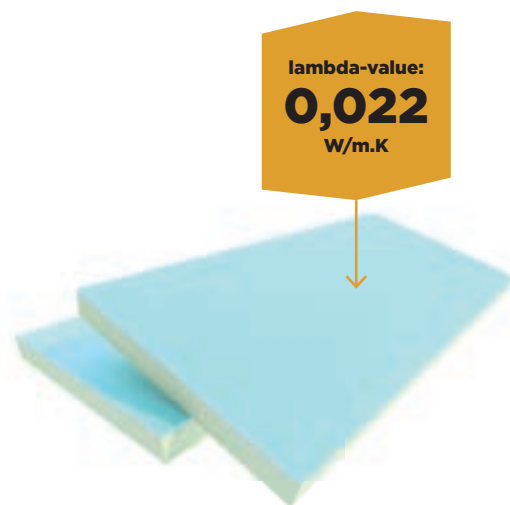


Insulation-thickness [mm]	$R_{D\text{ INSUL}}$ value [m ² K/W] CE	Boards per pack	m ² per pack	Boards per pallet	m ² per pallet	m ² full load [= 22 pal.]	In stock	On demand*
Wall K Gyp H: 2.600 x 1.200 mm								
30 + 12,5	1,40	30	12,50	28	87,36	31,85	✓	
40 + 12,5	1,85	40	12,50	23	71,76	32,85	✓	
50 + 12,5	2,30	50	12,50	19	59,28	33,85	✓	
60 + 12,5	2,75	60	12,50	16	49,92	34,85	✓	
80 + 12,5	3,65	80	12,50	13	40,56	36,85	✓	
100 + 12,5	4,55	100	12,50	9	28,08	38,85	✓	
120 + 12,5	5,50	120	12,50	8	24,96	40,85	✓	

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D according to EN 13165:2012+A2:2016	PIR : 0,022 W/m.K Gyp H : 0,25 W/m.K
Compressive strength at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	B-s1, d0 according to EN 13501-1
Long term water absorption	WL(T)2 according to EN 13165 < 2%

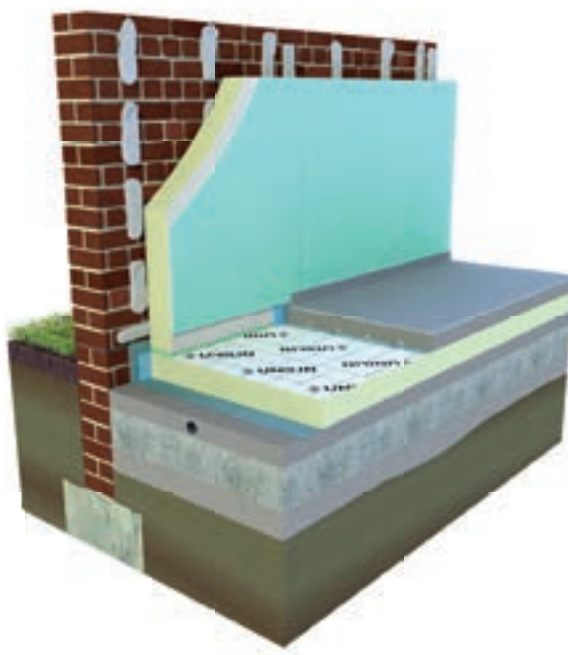

Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Wall K Gyp H v4



Attic



We like to make things easy for you with insulation boards that let you simultaneously insulate and finish your attic.



INSULATION FOR YOUR ATTIC



**Attic
ceiling**

→ **Utherm Attic L Gyp** — 58

Attic floor


→ **Utherm Attic L OSB** — 60

UTHERM Attic L Gyp

**Insulation board
for post-insulation
of attics**

Attic L Gyp is a PIR insulation board finished on both sides with a multilayer gastight laminate facer. Attic L Gyp is at one side finished with a layer of 12,5 mm thick plasterboard.

Application	Insulation and finishing in one board for post-insulation of attics from the inside out	
Insulation	Polyisocyanurate (PIR) Declared lambda-value (λ_p): 0,022 W/m.K R-value plasterboard (Gyp) : max. 0,066 m ² .K/W	
Facing	L : multilayer gastight laminate Gyp : 12,5 mm plasterboard at one side	
Dimensions	Standard	Net : 1189 x 600 mm Gross : 1200 x 613 mm
Edge finish	Combination with tongue- & groove joint along the 4 sides	

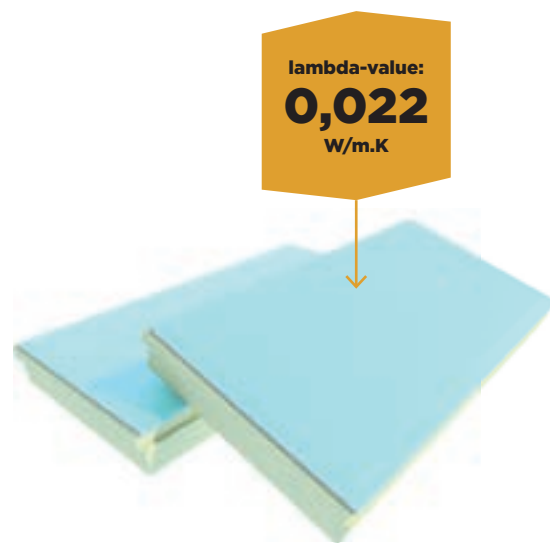


Total-thickness [mm]	R _{D INSUL + CB} value [m ² K/W] CE	Thickness insulation [mm]	Thickness CB [mm]	Boards per pallet	m ² per pallet	Weight [kg/pcs]	m ² full load [= 44 pal.]	In stock	On demand*
Attic L Gyp: 1200 x 613 mm									
80 + 12,5	3,70	80	12,50	24	17,65	8,35	776,60	✓	
100 + 12,5	4,60	100	12,50	20	14,71	8,80	647,24	✓	
120 + 12,5	5,50	120	12,50	18	13,24	9,30	582,56		✓
140 + 12,5	6,40	140	12,50	14	10,30	9,75	453,20		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D	PIR : 0,022 W/m.K Gyp : 0,25 W/m.K
Compressive strength of the PIR foam at 10% deformation : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength of the PIR foam perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability of the PIR foam 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions of the PIR foam	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	B-s1, d0 according to EN 13501-1
Long term water absorption of the PIR foam	WL(T)2 according to EN 13165 < 2%

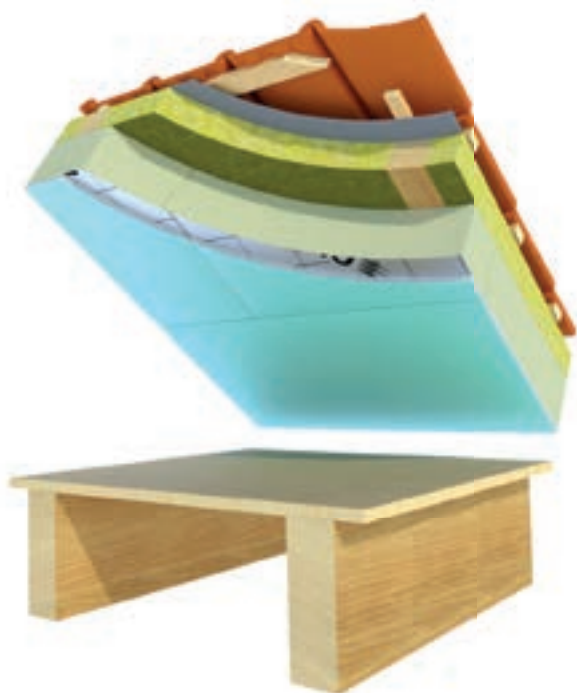

Certificates	
CE	λ 0,022 W/m.K
DOP	Utherm Attic L Gyp v5

UTHERM Attic L OSB

**Insulation board
for post-insulation
of attics**

Attic L OSB is a PIR insulation board finished on both sides with a multilayer gastight laminate facer. Attic L OSB is at one side finished with a layer of 12 mm thick OSB stranded wood board.

Application Insulation and finishing in one board for post-insulation of attic floors from the inside out

Insulation Polyisocyanurate (PIR)
Declared lambda-value (λ_D):
0,022 W/m.K
R-value OSB stranded wood board (OSB) : max. 0,092 m².K / W

Facing L : multilayer gastight laminate
OSB : 12 mm OSB stranded wood board at one side

Dimensions Standard Net : 1189 x 600 mm
Gross : 1200 x 613 mm

Edge finish Combination with tongue- & groove joint along the 4 sides



lambda-value:
0,022
W/m.K



Total-thickness [mm]	R _{D INSUL + CB} value [m ² K/W] CE	Thickness insulation [mm]	Thickness CB [mm]	Boards per pallet	m ² per pallet	Weight [kg/pcs]	m ² full load [= 44 pal.]	In stock	On demand*
Attic L OSB: 1200 x 613 mm									
40 + 12	1,90	40	12	46	33,84	6,25	1.488,96		✓
50 + 12	2,35	50	12	40	29,42	6,50	1.294,48		✓
60 + 12	2,80	60	12	34	25,01	6,75	1.100,44		✓
80 + 12	3,70	80	12	26	19,13	7,20	841,72	✓	
100 + 12	4,60	100	12	20	14,71	7,70	647,24	✓	
120 + 12	5,50	120	12	18	13,24	8,15	582,56		✓
140 + 12	6,45	140	12	14	10,30	8,60	453,20		✓
160 + 12	7,35	160	12	12	8,83	9,10	388,52		✓

* Minimum order quantities and special conditions upon consultation

TECHNICAL PROPERTIES

Declared thermal conductivity : λ_D	PIR : 0,022 W/m.K OSB : 0,130 W/m.K
Compressive strength at 10% deformation of the PIR foam : CS(10/Y)150 according to EN 826	≥ 150 kPa (1,5 kg/cm ²)
Tensile strength of the PIR foam perpendicular to the faces	TR80 ≥ 80 kPa
Dimensional stability of the PIR foam 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2$ / $\Delta\epsilon_d \leq 6$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1$ / $\Delta\epsilon_d \leq 2$
Deformation under compressive load and temperature conditions	DLT(2) $\leq 5\%$
Density of the PIR foam	32 kg/m ³ $\pm$ 3 kg/m ³
Water vapour transmission resistance of the PIR foam : μ	50-100
Reaction to fire class	D-s1, d0 according to EN 13501-1
Long term water absorption of the PIR foam	WL(T)2 according to EN 13165 < 2%



Accessories



**Let us give
you a helping
hand with
accessories
that facilitate
installation.**

Unilin Insulation lends a hand with practical aids that make it easier to install your insulation boards.

Consult the technical data sheet of the products below for additional information and take a look at the processing

guidelines to help you install the insulation boards properly. For more info go to **unilininsulation.com**



Accessoires



UNITAPE

Duct tape to tape off the seams between Wall insulation boards. Apply on a dry and clean substrate and press firmly.

1. Making insulation boards wind and watertight
2. User-friendly (application also possible with tape dispenser)
3. Excellent, long-lasting adhesive power (lasts twice as long)
4. Moisture-resistant and UV stable

UNITAPE	50 rm/roll, width 50mm
---------	---------------------------



UNIFLEX

Flexible fitting foam for sealing seams and connection joints between the insulation boards.

1. Ready-for-use, self-expanding polyurethane foam
2. Sealing seams and connection joints = better airtightness
3. 3 x more flexible than standard PU foam: follows the joint and does not tear
4. Excellent bonding with wood and other construction materials
5. Apply with a gun

UNIFLEX	750 ml
CLEANER	750 ml

UNDERLAY STRIP

Self-adhesive underlay strips for an air- and watertight connection with e.g. roof valleys, hips and skylights.

UNDERLAY STRIP	25 rm/roll, width 330mm
----------------	----------------------------



For a textbook installation



UTHERM SARKING SCREWS

High-quality screws, especially developed for fixing Utherm Sarking insulation boards; allow perpendicular installation.

Length (mm)	Diametre (mm)	Pcs/box
180	6	50
200	6	50
220	6	50
240	6	50
260	6	50
280	6	50
300	6	50
330	8	50
360	8	50




UTHERM ATTIC SCREWS

Phosphated screws for affixing Utherm Attic insulation boards to the roof structure using plasterboard or gypsum fibre. Your guarantee of a high-quality finish and optimal fixing to the substructure.

Length (mm)	Diametre (mm)	Pcs/box
120	4,8	250
140	4,8	250
160	4,8	100
180	6,0	100

ANGLE FILLETS

Angle fillets create a smooth, insulated transition between the horizontal flat roof surface and the vertical upstand. Unilin Insulation's angle fillet is a roof edge finish in the shape of an upward angled piece of PIR foam parallel to the roof's edge, enabling the roof covering to continue to the roof's edge and over the angle fillet.

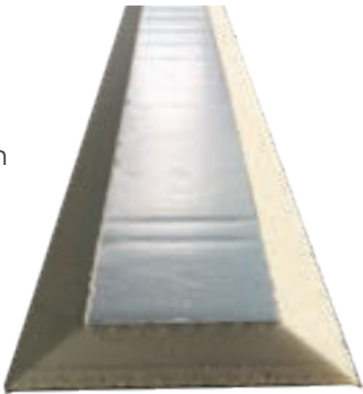

For a nice finish

	Width (mm)	Length (mm)	Depth (mm)	Pcs/box
ALUMINIUM VERSION	100 x 100	1.200	30	42
	50 x 50	1.200	30	60



Service & logistics



**Finding the best
insulation solution
for your project
together.**

Contact:

Customer service

+32 56 73 59 90

export.insulation@unilin.com



Service & logistics

ORDERS

For orders and questions regarding deliveries and billing you can contact us by phone at +32 56 73 59 90 or send an email to **export.insulation@unilin.com**.

All orders must specify the right quantities and specifications as well as a delivery address. Without correct or complete delivery information, deliveries cannot be made. Our Customer Service can be reached every working day from 8 a.m. till noon, and from 1 - 5 p.m. (Fridays until 4 p.m.).

CANCELLING ORDERS

Orders consisting of stock products (this information can be found per product in the delivery program or by consulting our customer service department) can be cancelled free of charge on condition that our Customer Service is notified by email or telephone within 24 hours of the order confirmation. Please note that this only applies to orders where there are at least five days between the order confirmation and the scheduled delivery date.

Orders consisting of **non-stock products** cannot be cancelled.

PAYMENT TERMS

Payment must be made in accordance with the applicable terms. These stipulations do not interfere with our general terms & conditions, which are available at our website **www.unilininsulation.com**

DELIVERY TERMS

Unless otherwise agreed all goods are delivered DDP (Delivery Duty Paid) in case of truck transport and collected by the customer FCA (Free Carrier) in case of container transport.

1° Orders of stock products

- Delivery of full loads: delivery from the day of the order + max. 5 working days

2° Orders of non-stock products

- Minimum order quantity = ca. 1000m²
- An additional delivery period of up to 10 working days applies
- Acceptance of the entire quantity produced is mandatory (order quantity + max. 5%)

Delivery periods are expressed in working days. Non-working days are weekend and (public) holidays.



NUMBER OF UNLOADING POINTS

Full loads can be unloaded on no more than 2 locations within a 100 km radius, with at least 6 pallets (600 x 1200mm) or 3 pallets (1200 x 2400mm) per unloading point. The surcharge for an additional loading point is determined as a function of volume and destination.

UNLOADING GOODS

It is assumed that unloading of goods can start immediately when a truck arrives at its destination. When a truck is referred to a different unloading address, Unilin Insulation reserves the right to charge additional costs. Unloading is handled by the customer, unless specifically agreed otherwise.

PROCESSING

For the processing of our products please refer to the processing instructions available at **www.unilininsulation.com**. They are also available at Customer Service.

Unilin Insulation

Waregemstraat 112 - 8792 Desselgem - Belgium

T +32 56 73 59 90

E export.insulation@unilin.com

W www.unilininsulation.com

January 2023

Information contained in this data sheet is up-to-date and correct as at the date of issue. Please check www.unilininsulation.com for the latest information. As Unilin cannot control or anticipate the conditions under which this product may be used, each user should review the information in the specific context of the planned use. To the maximum extent permitted by law, Unilin will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this datasheet. No express or implied warranties are given in this data sheet, including but not limited to a warranty of merchantability or fitness for a particular purpose.