


Utherm Sarking LE Plus

The smart solution for
external insulation of pitched roofs

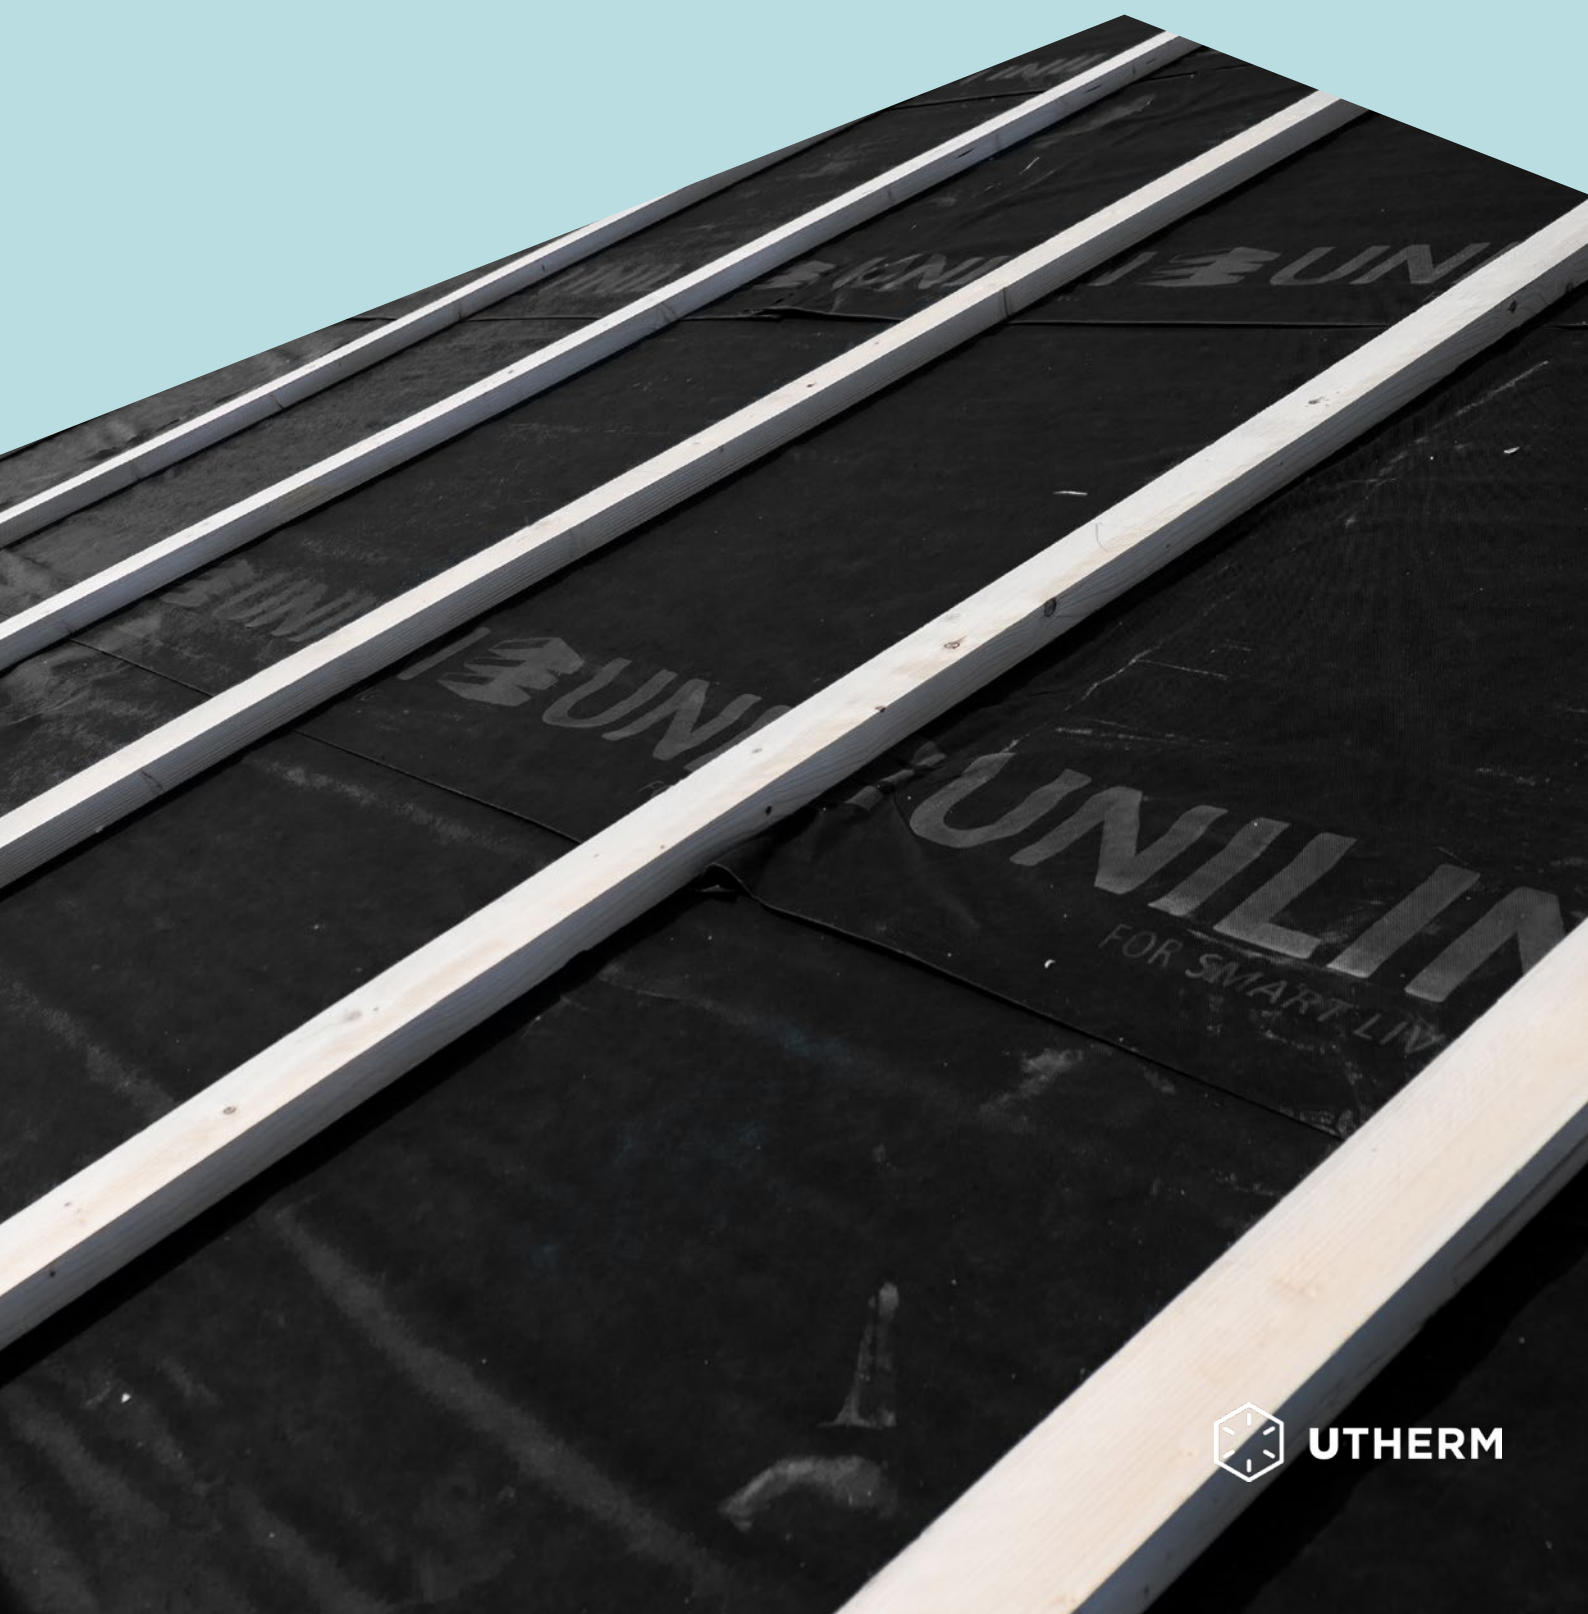

Utherm Sarking LE Plus

Utherm Sarking LE Plus is an all-in-one rigid insulation panel designed for above-rafter installation, providing exceptional thermal performance, airtightness, and weather protection in one easy-to-install layer.

With Utherm Sarking LE Plus, a pressure-resistant and high-performance PIR insulation board, you simply create a continuous insulation shell on top of the new or existing roof boarding.



This allows you to significantly improve the energy performance of the house, without loss of space or extensive interior work.



Why choose Utherm Sarking LE Plus?

Utherm Sarking LE Plus ensures a watertight and windproof envelope without compromising breathability, thanks to its integrated rain barrier and tongue-and-groove joints. The PIR insulation delivers outstanding λ -values to reduce heating costs and improve comfort year-round.

- ✓ High-quality PIR insulation board (**Lambda-value: 0,022 W/m.K**).
- ✓ Both sides finished with a **multilayer gastight laminate facer**.
- ✓ The outer side is finished with a **waterproof, vapor-open underlayment** adhered to the PIR board surface, with an **integrated overlap** for easier installation.
- ✓ Finishing on the 4 sides with **tongue- & groove joint**.
- ✓ **Euroclass E** fire reaction rating.

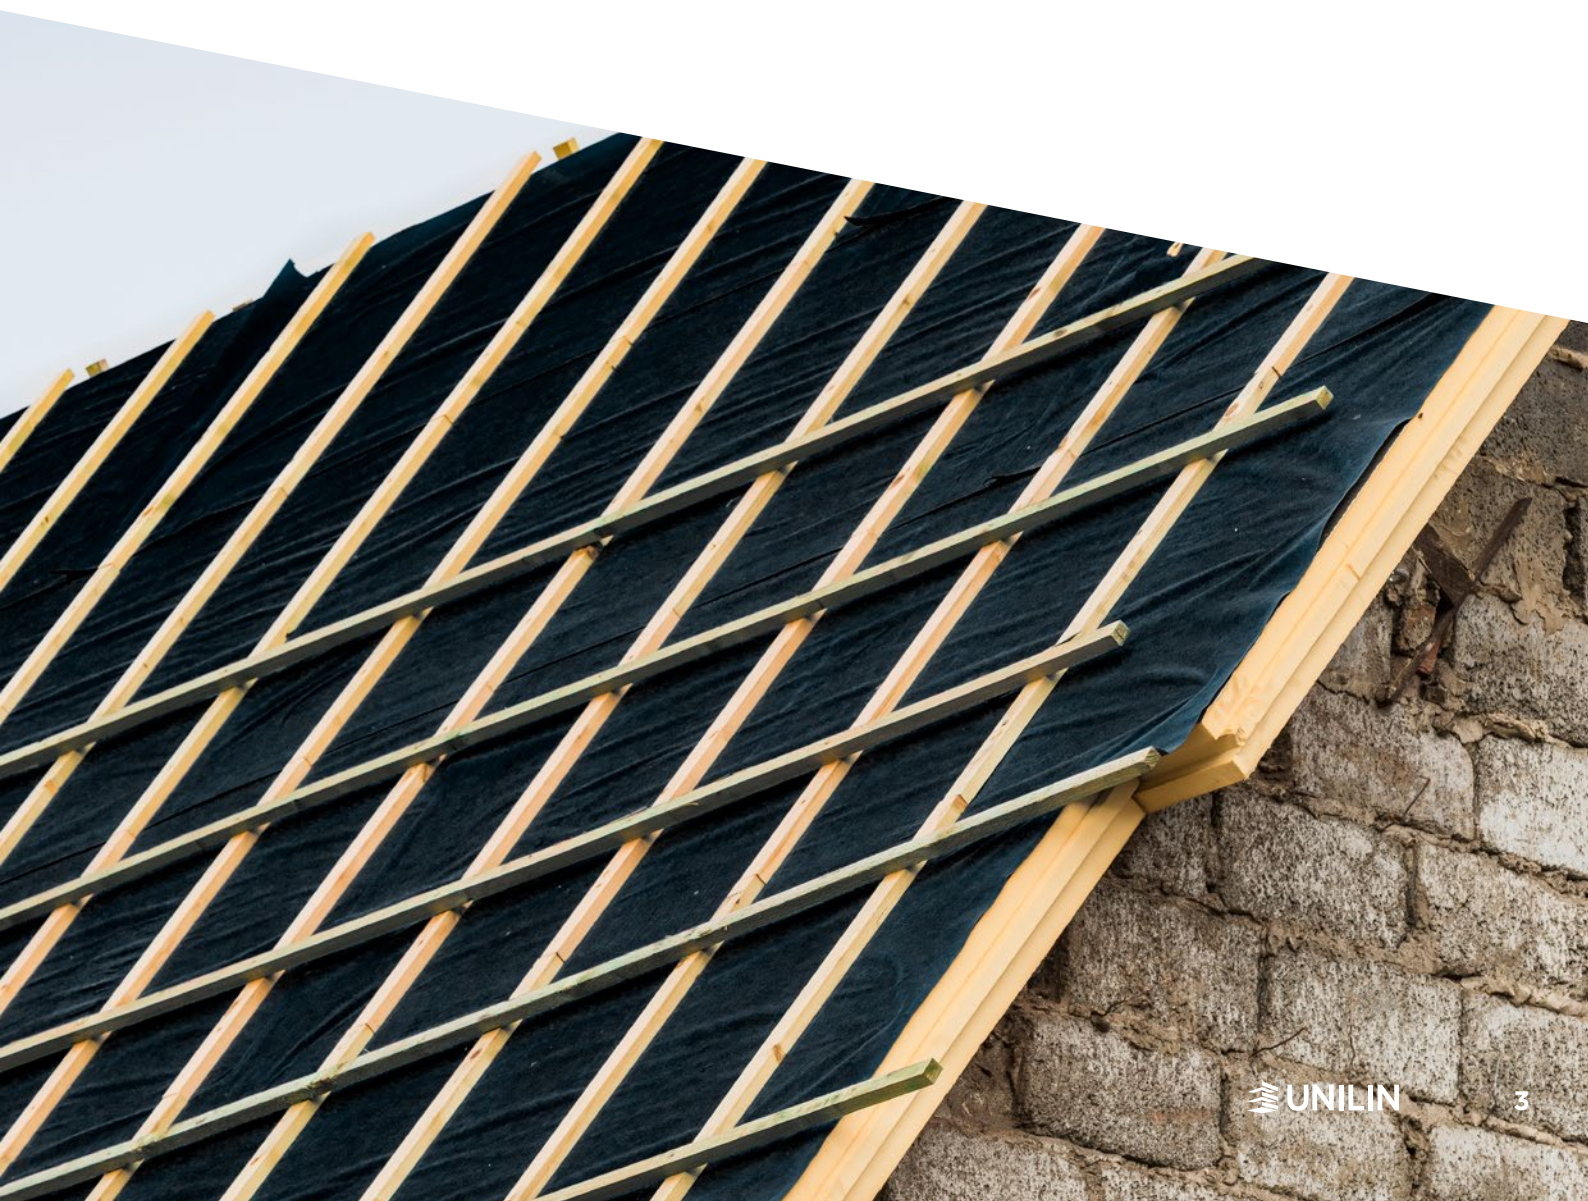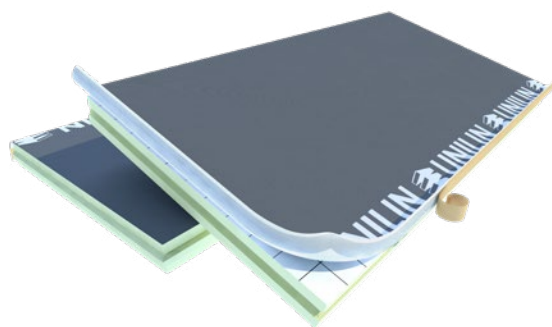


UTHERM Sarking LE Plus

Insulation board for
pitched roof and
sarking

Utherm Sarking LE Plus is a PIR insulation board Euroclass E finished on both sides with a multilayer gastight laminate facer, on the outer side finished with a waterproof, vapor-open underlayment adhered on the board surface.

Insulation	PIR (Polyisocyanurate) Declared lambda-value (λ_D) 0,022 W/(m.K)
Facing	Multilayer gastight laminate Finishing : water-resistant, vapor-open roof underlay foil with overlap
Dimensions	2400 x 1200 mm
Edge finish	Tongue- & groove joint along the 4 sides

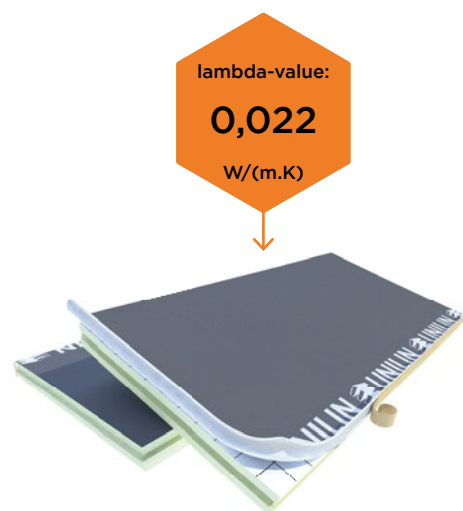

Thickness [mm]	RD INSUL value [m²K/W] CE	EAN code	Board per pack	m² per pack	Packs per pallet	Boards per pallet	m² per pallet	m² full load	In stock / on demand
Sarking LE Plus TG: 2400 x 1200 mm									
80	3,60	5414399082861	4	11,52	7	28	80,64	950,40	from 1000 m²
100	4,50	5414399082588	3	8,64	8	24	69,12	760,32	In stock
120	5,45	5414399082571	3	8,64	7	21	60,48	665,28	In stock
140	6,35	5414399082816	3	8,64	6	18	51,84	570,24	In stock
160	7,25	5414399082823	2	5,76	7	14	40,32	443,52	In stock
180	8,15	5414399082830	2	5,76	7	14	40,32	443,52	from 1000 m²
200	9,05	5414399082847	2	5,76	6	12	34,56	380,16	from 1000 m²

TECHNICAL PROPERTIES

Declared thermal conductivity: λ_D (PIR foam) according to EN13165:2012+A2:2016	0,022 W/(m.K)
Compressive strength at 10% deformation according to EN826 (PIR foam)	≥ 150 kPa
Tensile strength perpendicular to the faces (PIR foam)	TR80 ≥ 80 kPa
Dimensional stability (PIR foam) 48h, 70°C, 90%RH 48h, -20°C	DS(70,90)3: $\Delta\epsilon_{l,b} \leq 2\%$ / $\Delta\epsilon_d \leq 6\%$ DS(-20,-)1: $\Delta\epsilon_{l,b} \leq 1\%$ / $\Delta\epsilon_d \leq 2\%$
Thickness tolerance according to EN823 (PIR foam)	T2
Density (PIR foam)	32 ± 3 kg/m ³
Water vapour transmission resistance : μ (PIR foam)	50-100
Reaction to fire class according to EN13501-1 (PIR foam)	E
Long term water absorption (PIR foam)	WL(T)2 < 2%



Certificates	
CE	λ 0,022 W/(m.K)
DOP	Utherm Sarking LE Plus v5
EPD	B-EPD n° 21-0009-004-00-00-EN
ISO 14001	ISO 14001:2015

PIR insulation boards
with an integrated
underlay make any
pitched roof wind and
waterproof in no time.





Combines thermal excellence and minimal disruption

Exterior insulation with **Utherm Sarking LE Plus** combines thermal excellence with minimal disruption during installation. That combination makes it perfectly suited for **new-build or renovation projects** where **comfort, performance, and efficiency** are key.

Do you have any questions, or would you like to deploy this product in your project?
You can contact our team of experts!



Unilin Insulation
Waregemstraat 112
8792 Desselgem - Belgium
T +32 56 73 50 90
E export.insulation@unilin.com
W www.unilininsulation.com

Information contained in this data sheet is up-to-date and correct as at the date of issue. Please check www.unilininsulation.com for the latest information. As Unilin cannot control or anticipate the conditions under which this product may be used, each user should review the information in the specific context of the planned use. To the maximum extent permitted by law, Unilin will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this datasheet. No express or implied warranties are given in this data sheet, including but not limited to a warranty of merchantability or fitness for a particular purpose.